




Flexible Connector Type FFC Female Copper Sweat Ends

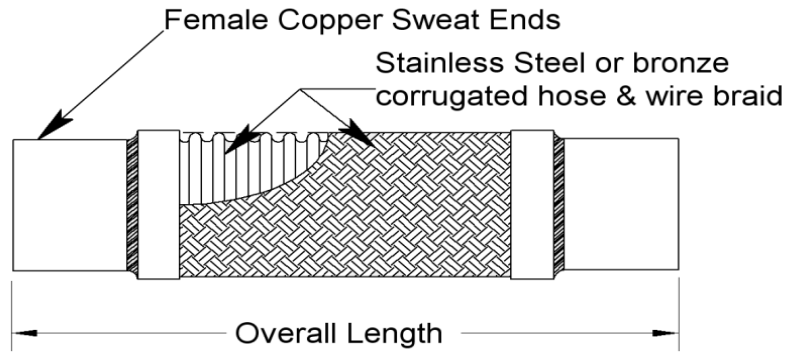

Typical Specification:

Provide, where indicated, a flexible connector consisting of corrugated hose surrounded and supported by Wire braid. End fittings are to be copper female sweat. Connector to be ____ inches nominal pipe size by ____ Inches overall length; **Thermo Tech model FFC or equal.**

Notes:

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock service at 70°F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/4" lateral offset.

*Manufactured with Stainless Steel Hose and Braid only on 2 1/2" and larger.

NOMINAL PIPE SIZE INCHES	OVERALL LENGTH INCHES	HOSE & BRAID WORKING PRESSURE PSIG
1/2"	10"	450
3/4"	10"	440
1"	10"	400
1 1/4"	10"	400
1 1/2"	12"	400
2"	14"	190
2 1/2"	16"	455*
3"	16"	345*

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Flexible Connector
Type FFC**