




Flexible Connector Type FF/ANSI (100% Domestic) Forged Steel R/F Flange Ends

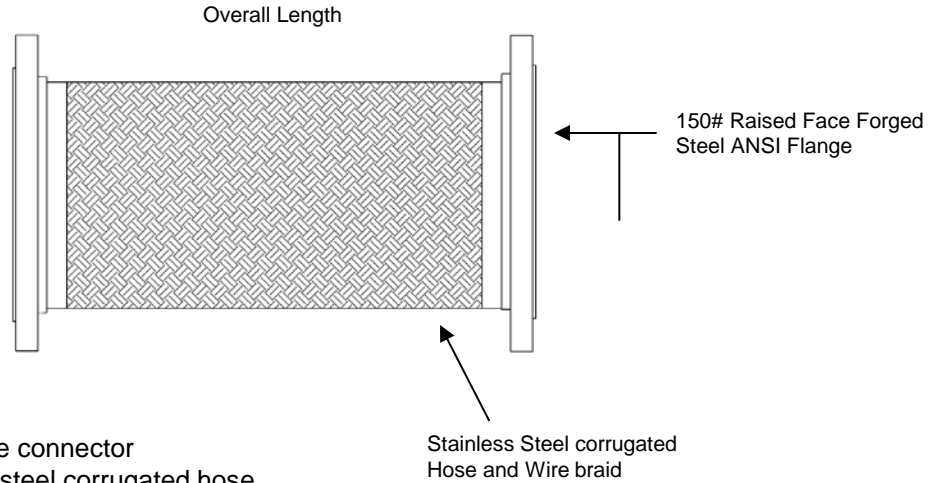

Typical Specification:

Provide, where indicated, a flexible connector consisting of 300 Series stainless steel corrugated hose surrounded and supported by 300 Series stainless steel braid. End fittings are to be forged steel 150# drilled raised face flanged ends. Connector to be ____ inches nominal pipe size by ____ Inches overall length; **Thermo Tech model FF/ANSI or equal.**

NOMINAL PIPE SIZE INCHES	OVERALL LENGTH INCHES	HOSE & BRAID WORKING PRESSURE PSIG
1 1/2"	9"	525
2"	9"	455
2 1/2"	9"	345
3"	9"	295
4"	9"	235
5"	11"	205
6"	11"	195
8"	12"	185
10"	13"	175
12"	14"	125
14"	14"	105

Notes:

Special end fittings, lengths, and pressure ratings are available.

Maximum working pressure is based on non-shock service at 70°F.

Braided metal connectors are not designed for compression or extension.

Install the connectors without torque, sharp bends, or any excessive offset.

This connector dampens vibration and accommodates 1/8" lateral offset.

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Flexible Connector
Type FF/ANSI**