






Flexible Connector Type FF/CHS Heat Pump Coil Hose

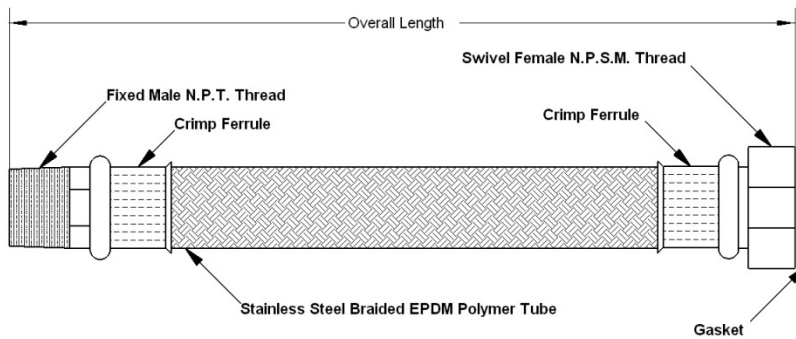

Optional Available End Fitting Adapters



Male N.P.T.



Female Copper Sweat

Typical Specification:

Provide, where indicated, a flexible connector consisting of EPDM tube surrounded and supported by Wire braid. End fittings are to be bronze female swivel x bronze fixed male NPT. Connector to be ____ inches nominal pipe size by ____ inches overall length; **Thermo Tech model FFCHS or equal.**

Notes:

Maximum Operating Temperature: 230°F.

Stainless Steel Braided EPDM Polymer Hose Tube

Designed for HVAC; Water or Glycol systems, not for gas or petroleum products, not suitable for vacuum

These quality coil hose flex connectors are fire tested.

| NOMINAL PIPE SIZE | BEND RADIUS | WORKING PRESSURE PSIG | AVAILABLE LENGTH ISSUES | | | |
|-------------------|-------------|-----------------------|-------------------------|----|----|----|
| | | | 12 | 18 | 24 | 36 |
| 1/2" | 4" | 350 | 12 | 18 | 24 | 36 |
| 3/4" | 5" | 300 | 12 | 18 | 24 | 36 |
| 1" | 6" | 250 | 12 | 18 | 24 | 36 |
| 1 1/4" | 7" | 200 | | 18 | 24 | 36 |

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Sante Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

Flexible Connector Type FF/CHS