





# Flexible Connector Type F/F/R

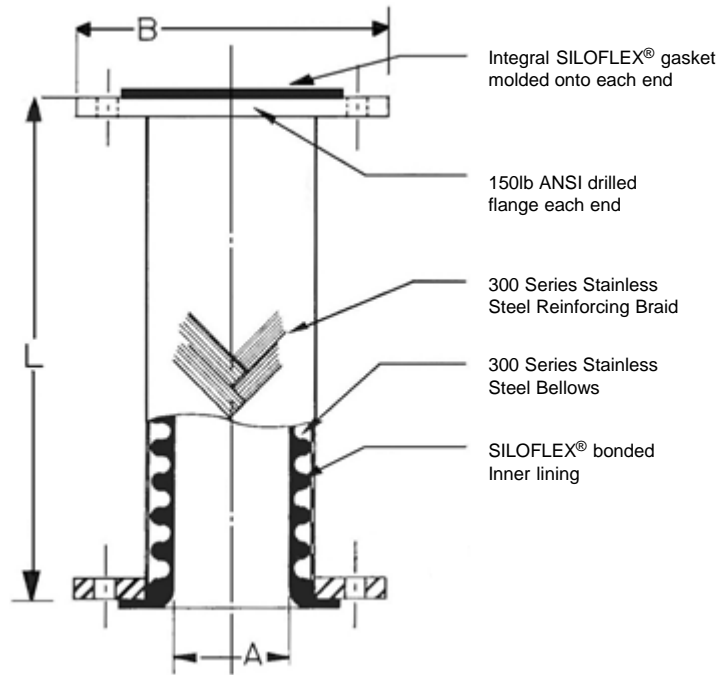

- All wetted surfaces SILOFLEX® silicone
- 300 series stainless steel convoluted bellows and wire braid
- Operating temperature of: -60° F to +300° F
- Working pressure of 150 PSIG, 300 PSIG available
- Working pressure based on non-shock service
- Smooth bore interior surface

NOMINAL SIZE INCHES A	FLANGE DIAMETER B	LENGTH L			
1 ½	5	6	12	18	
2	6	6	12	18	
2 ½	7	6	12	18	
3	7 1/2	6	12	18	
4	9	6	12	18	
5	10		12	18	24
6	12		12	18	24
8	13 1/2		12	18	24
10	16		12	18	24
12	19		12	18	24

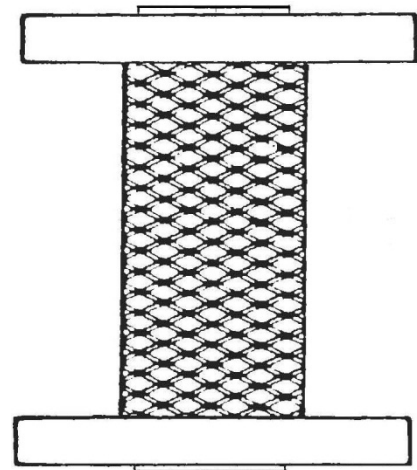

Job \_\_\_\_\_

Contractor \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Order No. \_\_\_\_\_ Date \_\_\_\_\_

Submitted by \_\_\_\_\_

Approved by \_\_\_\_\_ Date \_\_\_\_\_

Tag \_\_\_\_\_

**THERMO  
TECH I N C.**

287 South Santa Fe Drive  
Denver, Colorado 80223  
Phone (303) 698-9988  
www.thermotechdenver.com

**Flexible Connector  
Type Sanitary F/F/R  
SILOFLEX® Lined**