




Sanitary Connector Vibration Control Model 1464D

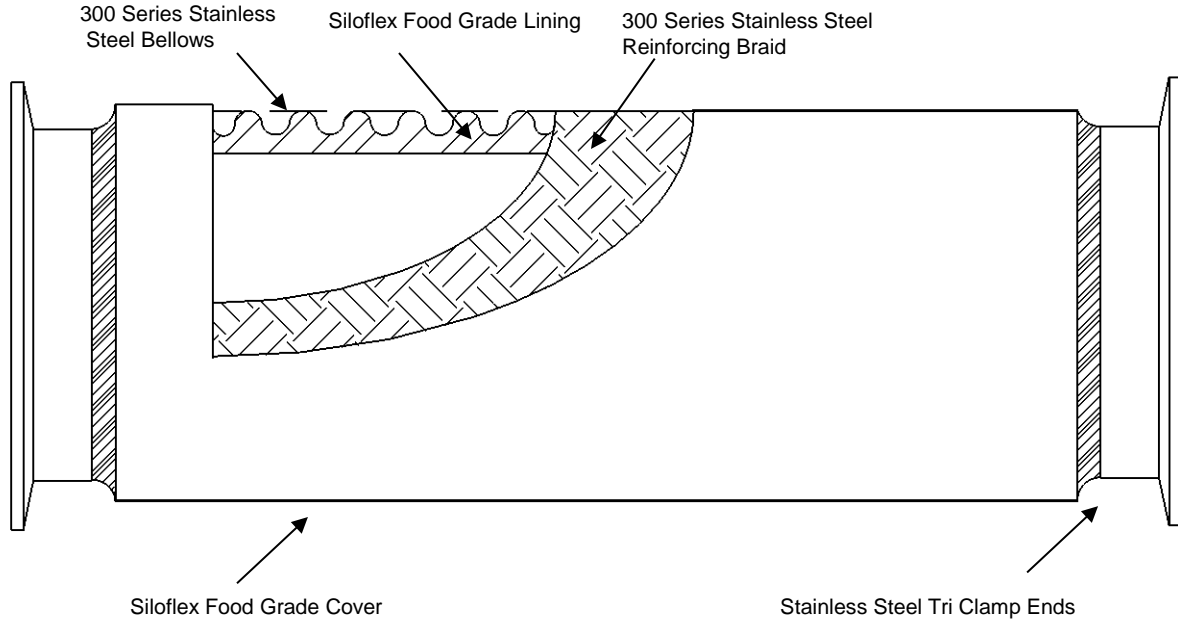

Available with clamp type, bevel seat and nut, cam lock, flanged and threaded ends in T304 or T316 stainless steel.

- Meets or exceeds 3A and FDA standards
- Available to match 1 ½", 2", 2 ½", 3", 4" diameter tubing
- Working pressure 300 PSIG up to 300°F
- Smooth, sanitary interior tube surface
- Suitable for Clean In Place with hot caustic and open ended steam
- Piping must be anchored opposite to any vibration or movement

NOMINAL SIZE INCHES	AVAILABLE LENGTHS (INCHES)			
1 ½	12			
2	12	18	24	
2 ½	12	18	24	
3	12	18	24	30
4	12	18	24	30

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Santa Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Model 1464D
Sanitary Connector**