




Sanitary Transfer Hose Type 7390-4909

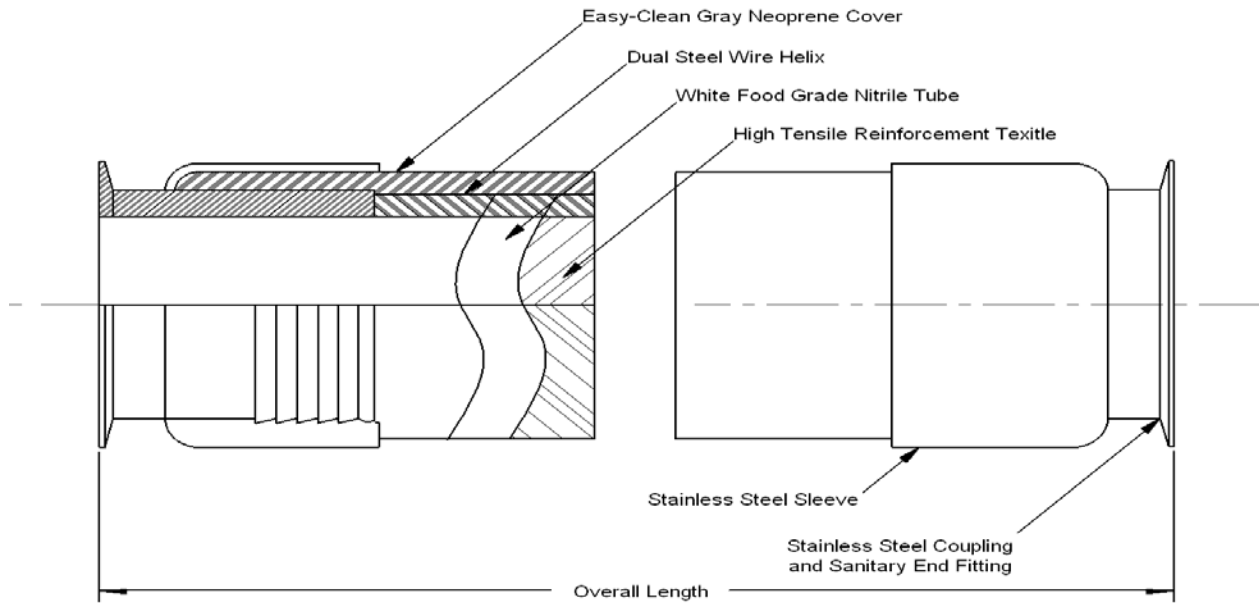

Available with clamp type, bevel seat and nut, cam lock, flanged, threaded or weld ends in T304 or T316 stainless steel.

The hose and fittings meet or exceed 3A and FDA standards.

Working Pressure: 150 PSIG
Maximum Temperature: 200°F

Smooth sanitary interior surface has **no areas of entrapment** between the hose and fittings.

Hose and fittings are suitable for Clean In Place with hot caustic or open ended steam cleaning.

Wire reinforced for **full suction and discharge** hose applications

Fabricated in lengths to 100 feet

NOMINAL HOSE SIZE	MINIMUM BEND RADIUS
1 ½	9
2	11
2 ½	12 1/2
3	14
4	17

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Santa Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Sanitary Transfer Hose
Type 7390-4909**