




Rubber Covered Smooth Bore Teflon Hose Model 6279S

Smoothbore White Seamless PTFE Tube

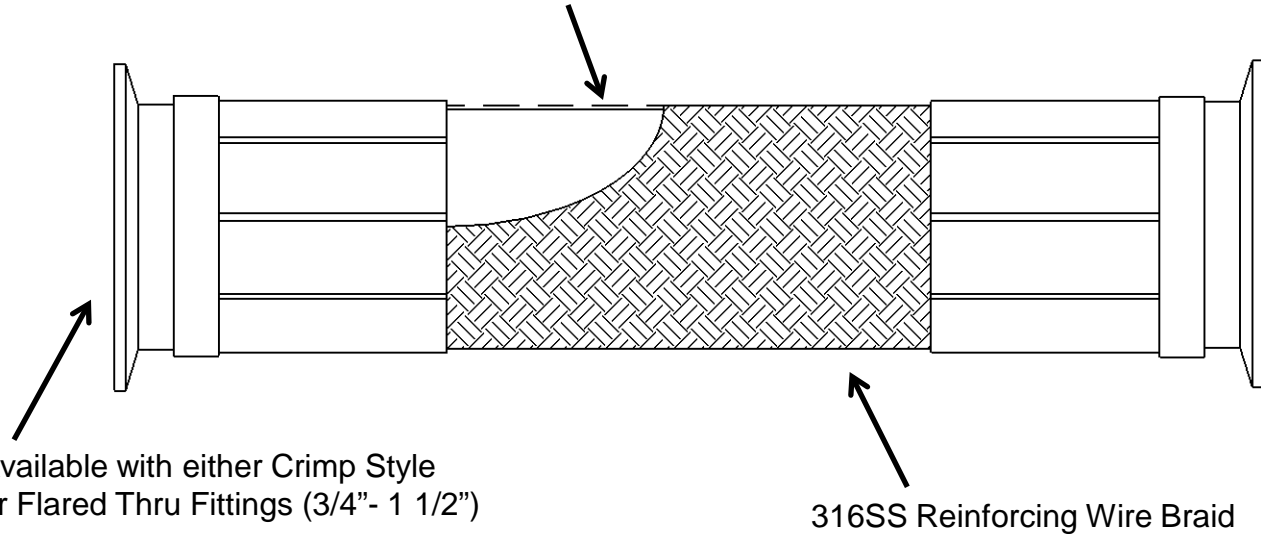

Available with either Crimp Style
or Flared Thru Fittings (3/4" - 1 1/2")

316SS Reinforcing Wire Braid

- Temperature Range -20 to 350°F
- Full Vacuum Rated
- Consult factory for specifications on Flared Thru hoses

Pipe Size	Bend Radius (Inches)	Max Pressure (PSIG) @ 70°
1/4"	3	3000
3/8"	5	2000
1/2"	6.5	1425
3/4"	8.2	1000
1"	12	1000
1 1/2"	20	1000

Job _____

Contractor _____

Engineer _____

Representative _____

Order No. _____ Date _____

Submitted by _____

Approved by _____ Date _____

Tag _____



287 South Santa Fe Drive
Denver, Colorado 80223
Phone (303) 698-9988
www.thermotechdenver.com

**Convuluted PTFE Assembly
Model 6279S**